



### Construction

Close-coupled self-priming centrifugal pumps with built-in strainer.

### Applications

For water circulation in swimming pool filtration systems.  
For clean or slightly dirty water with solids in suspension.

### Operating conditions

Liquid temperature up to 60° C.  
Ambient temperature up to 40° C.  
Total suction lift up to 7 m.  
Maximum permissible working pressure up to 6 bar.  
Continuous duty.

### Motor

2-pole induction motor, 50 Hz (n = 2900 rpm).

**NMP:** three-phase 230/400 V ± 10% up to 3 kW;  
400/690 V ± 10% from 4 to 11 kW;

**NMPM:** single-phase 230 V ± 10%, with thermal protector.  
Insulation class F.  
Protection IP 54.  
Constructed in accordance with: IEC 60034.


### Special features on request

- Other voltages.
- Frequency 60 Hz (as per 60 Hz data sheet).
- Protection IP 55.
- Special mechanical seal
- Higher liquid or ambient temperatures.

### Materials

Components	NMP	B-NMP
Pump casing	Cast iron	Bronze
Lantern bracket	GJL 200 EN 1561	G-Cu Sn 10 EN 1982
Impeller	Cast iron	Bronze
	GJL 200 EN 1561	G-Cu Sn 10 EN 1982
	Brass P- Cu Zn 40 Pb 2 UNI 5705 for NMP 32/12	
Shaft	Chrome-nickel steel	Cr-Ni-Mo steel
	1.4305 EN 10088 (AISI 303)	1.4401 EN 10088 (AISI 316)
Strainer cover	Cast iron	Bronze
	GJL 200 EN 1561	G-Cu Sn 10 EN 1982
Strainer	Chrome-nickel steel 1.4301 EN 10088 (AISI 304)	
Mechanical seal	Carbon - Ceramic - FPM	

### Coverage chart n ≈ 2900 rpm

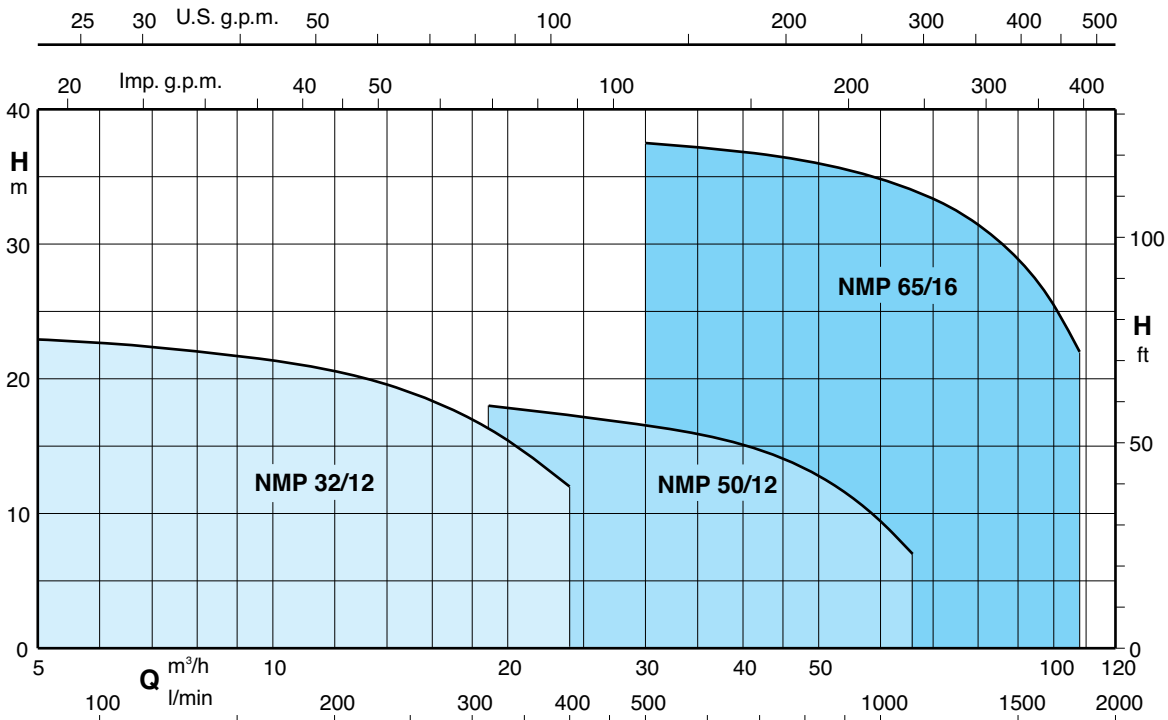

### Performance $n \approx 2900$ rpm

3 ~	230V 400V		1 ~	230V P <sub>1</sub>		P <sub>2</sub>		Q m <sup>3</sup> /h l/min	H																		
	A	A		A	kW	kW	HP		6,6	9,6	10,8	12	13,2	15	18,9	21	24	30	42	48	54	60	66	75	84	96	108
B-NMP 32/12FE	4	2,3				0,55	0,75		110	160	180	200	220	250	315	350	400	500	700	800	900	1000	1100	1250	1400	1600	1800
			B-NMPM 32/12FE	4,5	0,8	0,55	0,75		13	12	11	10,5	10	9													
B-NMP 32/12DE	4	2,3				0,75	1		12	11	10	9,5	9	8													
			B-NMPM 32/12DE	5,8	1,3	0,75	1		18	17	16	15,5	15	14													
B-NMP 32/12AE	5	2,9				1,1	1,5		17	16	15	14,5	14	13													
			B-NMPM 32/12AE	7,4	1,85	1,1	1,5		22	21	20,5	20	19,5	18,5													
B-NMP 32/12SE	7,5	4,3	B-NMPM 32/12SE	9,2	2	1,5	2		21,5	20,5	19,5	19	18,5	17,5													
B-NMP 50/12HE	5	2,9	B-NMPM 50/12HE	7,4	1,85	1,1	1,5		22,5	21,5	21	20,5	20	19	16*	15*	12*										
B-NMP 50/12GE	7,5	4,3	B-NMPM 50/12GE	9,2	2	1,5	2								9	9	8,5	7,5	5,5	4,5	3						
B-NMP 50/12FE	9,15	5,3				2,2	3								12	12	11,5	10,5	8	7	5	3,5*					
B-NMP 50/12DE	11,5	6,6				3	4								16	16	15,5	14,5	12	10,5	8,5	6,5*	5*				
B-NMP 65/16FE		9,6				4	5,5								18	18	17,5	16,5	15	13	11,5	9,5*	7*				
B-NMP 65/16EE		12				5,5	7,5											18	17	16,5	15,5	14,5	13,5	11,5	9,5	6,5*	
B-NMP 65/16DE		16				7,5	10											20,5	19,5	19	18	17	16	14,5	12,5	9,5*	
B-NMP 65/16CE		20				9,2	12,5											26	25	24,5	24	23	22	21	19	16*	11*
B-NMP 65/16AE		24				11	15											29,5	28,5	28	27,5	27	26,5	25	23,5	20*	16*
																		37,5	36,5	36	35,5	35	34	32,5	30,5	27*	22*

P<sub>1</sub> Maximum power input.

B-NMP = Bronze construction.


\* Maximum suction lift 2-3 m.

P<sub>2</sub> Rated motor power output.

H Total head in m.

Tolerances according to ISO 9906, annex A.










### Dimensions and weights

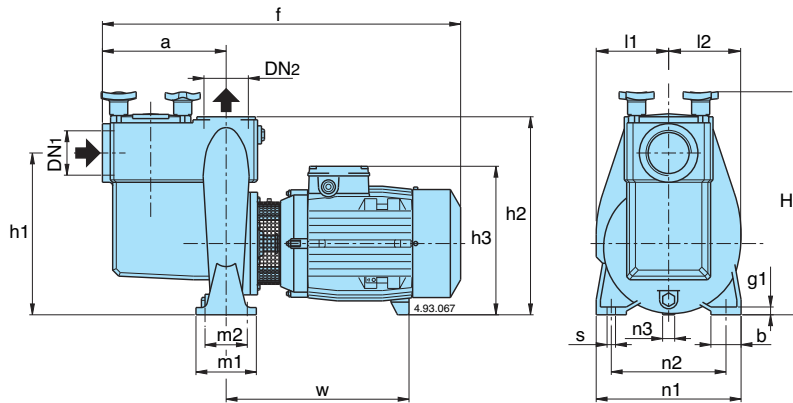

TYPE	DN <sub>1</sub>	DN <sub>2</sub>	mm																	
			ISO 228	a	f	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub>	H	m <sub>1</sub>	m <sub>2</sub>	n <sub>1</sub>	n <sub>2</sub>	n <sub>3</sub>	b	s	l	l <sub>1</sub>	l <sub>2</sub>	w
B-NMP 32/12AE-DE-FE B-NMP 32/12SE	G 2	G 2	195	510	230	280	228	320	100	70	190	140	30	50	14	-	106	99	220	12
B-NMP 50/12FE-GE-HE B-NMP 50/12DE	G 2 1/2	G 2 1/2	205	540 602	262	322	240	360	100	70	240	190	37 20	50	14	-	120	117	234 298	12
B-NMP 65/16FE B-NMP 65/16DE-EE B-NMP 65/16AE-CE	G 3	G 3	320	717 748 858	360	440	320	470	125	95	280	212	60 49 43	65	14	-	165	164	298 319 408	15

TYPE	NMP kg	B-NMP kg
B-NMP 32/12FE	30	32
B-NMP 32/12DE	30	32
B-NMP 32/12AE	31	33
B-NMP 32/12SE	33	35
B-NMP 50/12HE	37	39
B-NMP 50/12GE	38,5	40
B-NMP 50/12FE	38,5	41,5
B-NMP 50/12DE	47,5	51,5
B-NMP 65/16FE	78,5	89
B-NMP 65/16EE	91	101
B-NMP 65/16DE	97	107
B-NMP 65/16CE	121	130
B-NMP 65/16AE	127	137

Characteristic curves  $n \approx 2900$  rpm

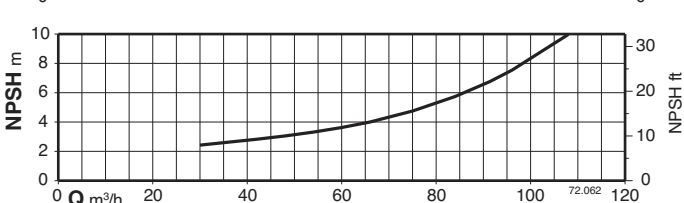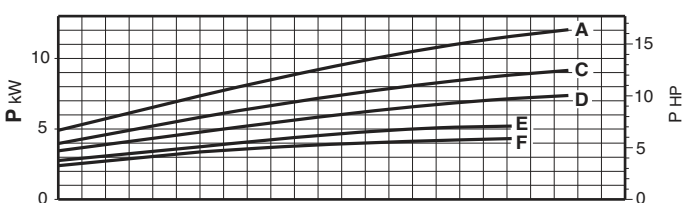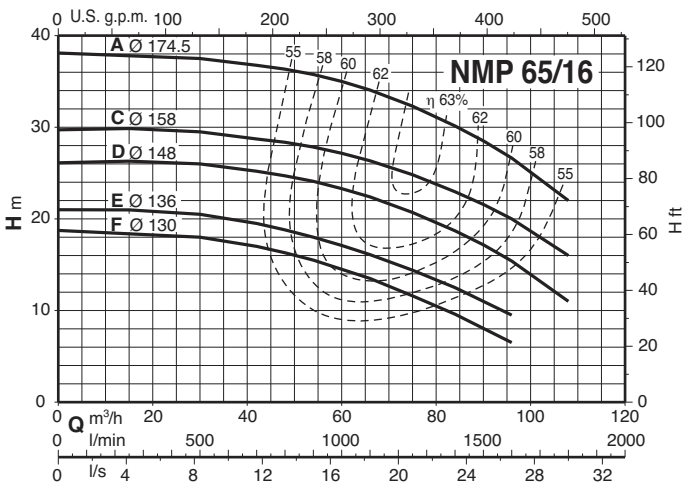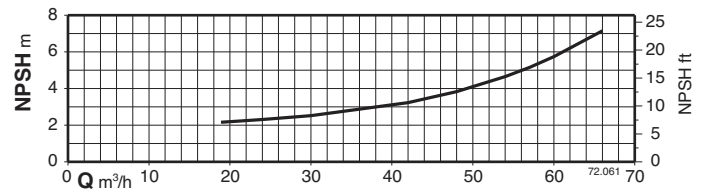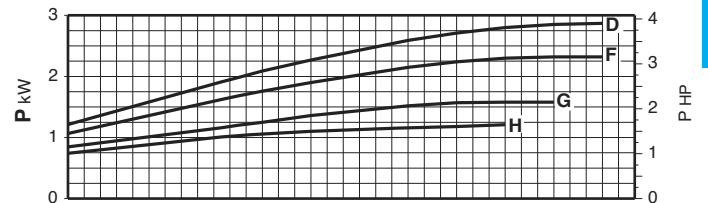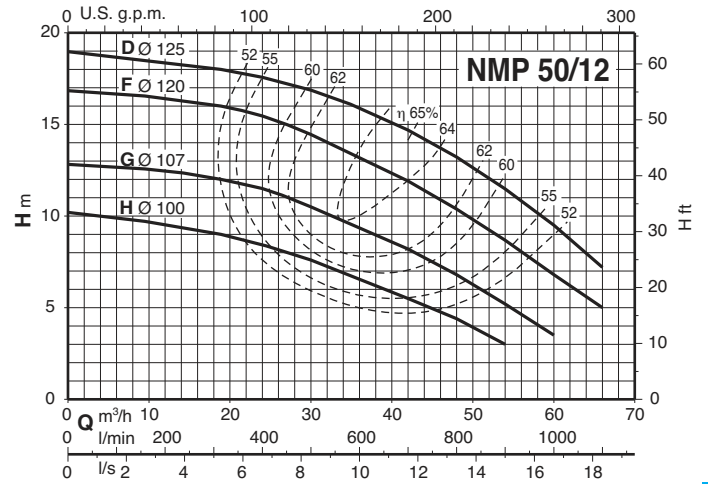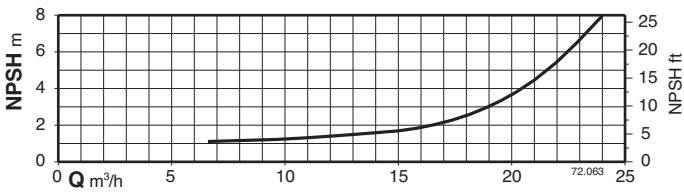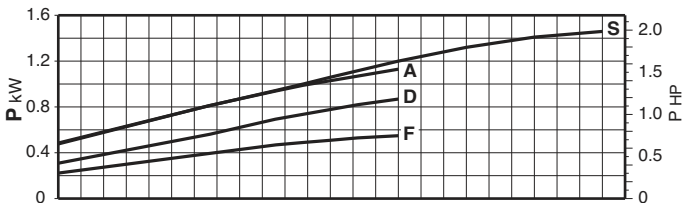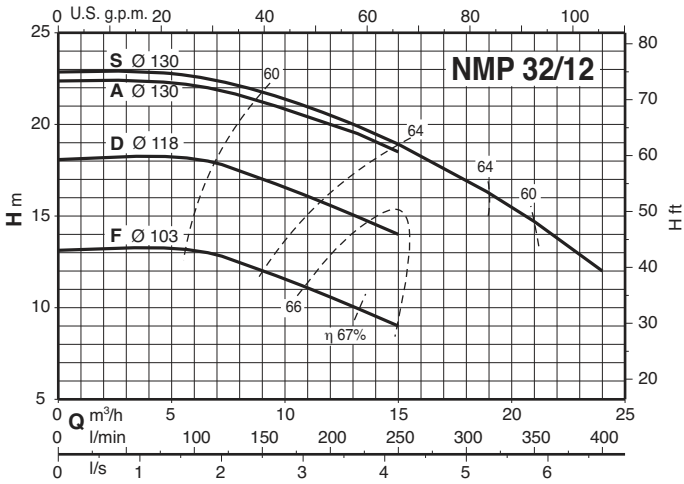

15

